


FÖRDERGURT- UND KOMPENSATORENPRODUKTIONS GMBH

A-1080 Wien, Schlösselgasse 22 · Tel: +43 (1) 405 16 07 · Fax: +43 (1) 408 30 52 · E-mail: office@HASEsystems.at

Your Company			
Type	☐ User ☐ OEM / Eng. ☐ Agent ☐ Consultant		
Contact Person			
Phone		Email	
Fax		Date	

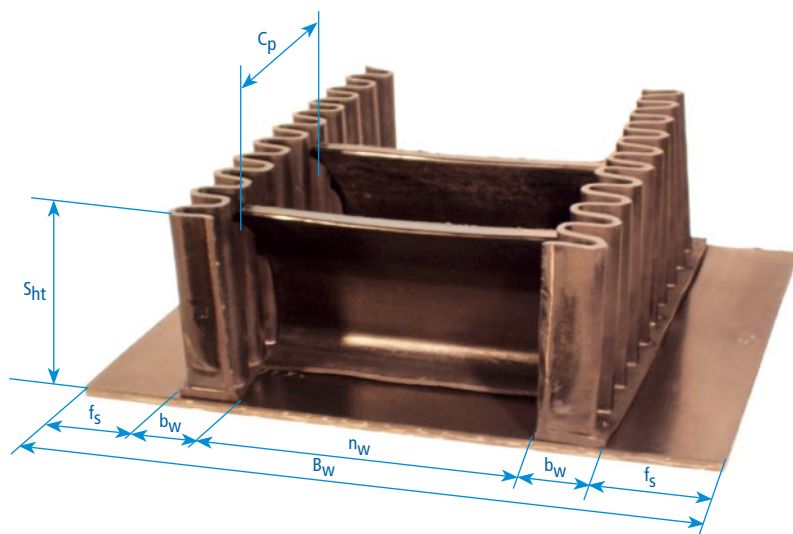

Type „T“



Type „C“



Type „TC“



Type „TC-XS“



Screw reinforcement

Belt width	B _W	mm
Base belt tensile strength		N/mm
Base belt quality		☐ high abrasion resistant ☐ heat resistant up to 100°C ☐ oil and fat ☐ flame retardant
Free lateral space	f _s	mm
Net belt width	n _W	mm
Sidewall height	S _{ht}	mm
Sidewall width	b _W	mm
Cleat type		please, select cleat type in the right column
Cleat height	C _h	mm
Cleat pitch	C _p	mm
Length endless or open		m

Splice: We assume endless, if not specified differently ☐ open

send facsimilar message to +43 (1) 408 30 52 or email filled out pdf-form to office@HASEsystems.at